



CL200

**Surface Deadbolt**

Bolt slides on inside of the door, to lock or unlock. Bolt is moved manually by outside knob after code input and freely by inside knob at all times. A surface and mortise mounted keep is provided. Stainless Steel finish only.



CL210

**Mortice Deadbolt**

The bolt is moved manually by means of the outside knob after the code has been entered, and freely by the inside knob at all times. Bolt extends 25mm (1") beyond door edge when locked.



CL255

**Mortice Latch**

The latch is spring loaded and will lock automatically when the door is closed. The latchbolt has a deadlocking plunger feature to prevent unlawful shimming of the latch. Supplied with 'hold open' option as standard, allowing free entry without inserting the access code. The option can be disabled on installation requiring code to be entered every time to open the door.



**Code Change Method**

Requires removal of lock from door. Locks are supplied with a random code commencing with the 'C' clear button. To change the code after fitting, the lock must first be removed from the door. The code is non sequential, i.e. the code can be entered in any preferred order (e.g. 1234 can be 4321 or 1342). A total of 8,191 different codes are available - any of which can be entered in any order.

Neoprene seals are included on both sides to provide friction against the face of the door and to avoid damage from over tightening of the fixing bolts.

OPTIONS

**Latch Options:**

Light-duty with stainless steel latchbolt head, with 'anti-shim' plunger, 60mm (2<sup>3</sup>/<sub>8</sub>") backset requires 25mm (1") hole, 82mm (3<sup>1</sup>/<sub>4</sub>") deep.

**Also Available:**

50mm (2") backset latch requires 25mm (1") x 72mm (2<sup>7</sup>/<sub>8</sub>") hole. 70mm (2<sup>3</sup>/<sub>4</sub>") backset latch requires 25mm (1") x 92mm (3<sup>5</sup>/<sub>8</sub>") hole.

**Back to Back Option (BB):**

Two coded plates for installation on both sides of the door. Provides coded access in both directions.

**Key Override (K):**

Locks can be ordered with key override.




**For further product model options see price list.**

TECHNICAL SPECIFICATIONS

Options	Eight available
Spindle Type	Flat spring loaded spindle
Material	Zinc Alloy
Door Thickness	35mm - 60mm (1 <sup>3</sup> / <sub>8</sub> " - 2 <sup>3</sup> / <sub>8</sub> ")
Buttons	14 stainless steel buttons
Non Handed	Locks will fit doors hung on the left or right
Fitting Options	Vertical
Finish	PVD (Physical Vapour Deposition) hardwearing low maintenance finishes SS (stainless steel) and PB (polished brass)
Codes	8,191 non sequential codes available
Code Storage	Single Code
Key Override	Available to order on any function
Keyed Alike	Locks can be supplied Keyed Alike on request
Standards	Codelocks Fire Kit Packs can be fitted to latch locks for 30 or 60 minute fire doors. Tested in accordance with: BS EN 1634-1:2008
Suitable For	Internal and external use

PRODUCT DIMENSIONS

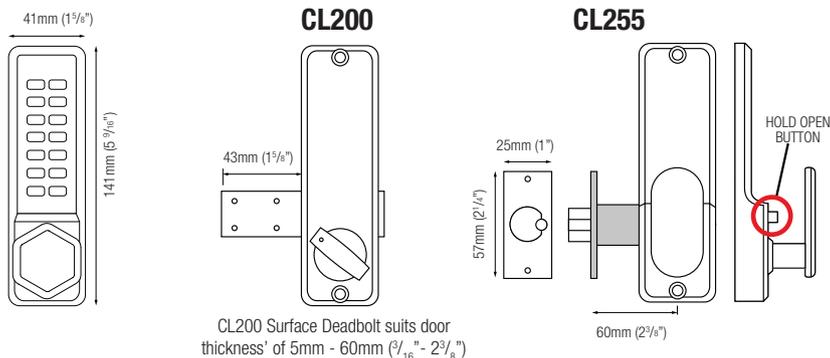

\*Codelocks mechanical locks will be repaired, serviced or replaced free of charge if they develop a manufacturing fault. Faults caused by misuse, abuse and/or poor fitting are not covered by the guarantees.

