



CL2200

Surface Deadbolt

Bolt slides on the inside surface of the door to lock or unlock. Bolt is moved manually by means of the outside knob after code input and freely by the inside knob at all times. A surface and mortice mounted keep is provided. When a valid code is entered and the Blue LED lights up, the knob will retract the bolt.



CL2210

Mortice Deadbolt

Bolt extends 25mm (1") beyond door edge when locked. When a valid code is entered and the Blue LED lights up, the knob will retract the bolt.



CL2255


Tubular Mortice Latch

Light-duty with stainless steel latchbolt head, with 'anti-shim' plunger. When a valid code is entered and the Blue LED lights up, the knob will retract the latchbolt. When the door closes the spring latch will automatically lock the door.



Code Change Method

Set via keypad using Master Code



Code Free Mode

Set via keypad or key

OPTIONS

Latch Options:


2 latch options: 50mm (2") backset requires 25 x 72mm (1" x 2 7/8") hole. 70mm (2 3/4") backset requires 25 x 92mm (1" x 3 5/8") hole. 60mm (2 3/8") backset requires 25mm (1") hole, 82mm (3 1/4") deep.

Key Override:

The key will open the door on all locks for management functions.

For further product model options see price list.

Easy Upgrade

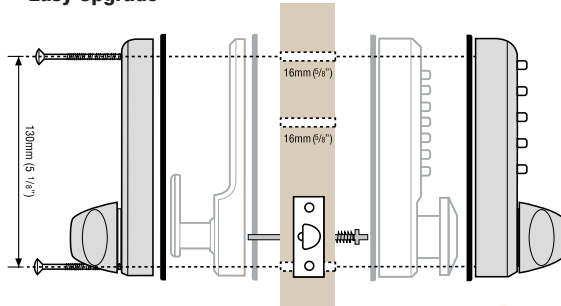


- 1 Remove existing mechanical digital lock
- 2 Drill single 20mm (1 3/16") hole for cable
- 3 Fit CL2000 on door using existing fixings




PRODUCT DIMENSIONS


CL2200



CL2210

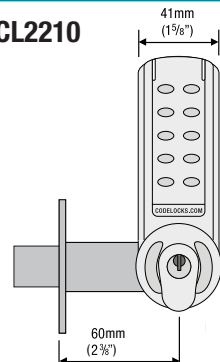

CL2255



*Codelocks electronic locks offer a two year guarantee and will be repaired, serviced or replaced free of charge if they develop a manufacturing fault. Faults caused by misuse, abuse and/or poor fitting are not covered by the guarantees.

TECHNICAL SPECIFICATIONS

Options	Three available
Operations	80,000 per set of batteries
Batteries	2 x 1.5 v AA Cells
Low Battery Warning	Red LED will flash on opening to indicate batteries need to be changed
Memory	Stores 80 different User Codes
Battery Override	Lock can be opened by attaching a PP3 battery to contact points and entering the Master Code
Spindle Type	Flat bar spindle, 8mm adaptor supplied
Material	Zinc Alloy
Door Thickness	35mm – 60mm (1 3/8" – 2 3/8")
Buttons	Individual stainless steel buttons
Non Handed	Locks will fit doors hung on the left or right
Remote Release 1	(Rem 1) option fitted as standard to open lock remotely via cable
Remote Release 2	(Rem 2) option allows connection to alarm release
Fitting Options	Vertical
Finish	PVD (Physical Vapour Deposition) hardwearing low maintenance finishes BS (brushed steel) and PB (polished brass)
Keyed Alike	Supplied Keyed Alike on request
Key Override	As standard
Codes	4, 5 or 6 digit codes giving a maximum of 1,000,000 unique codes
Standards	Codelocks Fire Kit Packs can be fitted to latch locks for 30 or 60 minute fire doors. Tested in accordance with: BS EN 1634-1:2008
Suitable for	Internal and external use